

KIL640/642/646/647/648/655
KIP640/642/646/647/648/655



Display size
**40", 42", 46",
47", 48" or 55"**

Max load
75lb (34kg)

Wall Kiosk Enclosure

Fits 40", 42", 46", 47", 48" and 55" Displays up to 2" (50mm) Thick


Whether transforming a letter board into an interactive directory or making a movie poster come to life, Peerless-AV's wall kiosks create engaging digital solutions for portrait or landscape oriented applications. Even with a slim ADA-compliant 3.97" profile, these wall kiosks accommodate most ultra-thin displays while providing room for media players, fans, and other electronic equipment to create an impressive interactive solution.

*Displaying digital signage content
has never been easier!*



Additional Features

- ✓ Eight way tool-less adjustment to quickly position display in kiosk window for flush alignment
- ✓ Accommodates displays 2.00" (50mm) thick to accentuate the slim kiosk design
- ✓ VESA® 200 x 200 up to 400 x 600mm compatible
- ✓ Thermostat controlled circulation fans ensure proper airflow within the kiosk
- ✓ Low profile design extends 3.97" (101mm) away from the wall which meets the Americans with Disabilities Act (ADA) certification
- ✓ Hinged top frame offers easy access to the display and other internal components for easy maintenance and enhanced security
- ✓ Supports wide range of aesthetic options including glass/acrylic, multiple colors, vinyl wraps, etc. to best match environment or promote brand strategy
- ✓ Pre-assembled to simplify installation of the entire solution
- ✓ Custom sizes available for smaller and larger displays

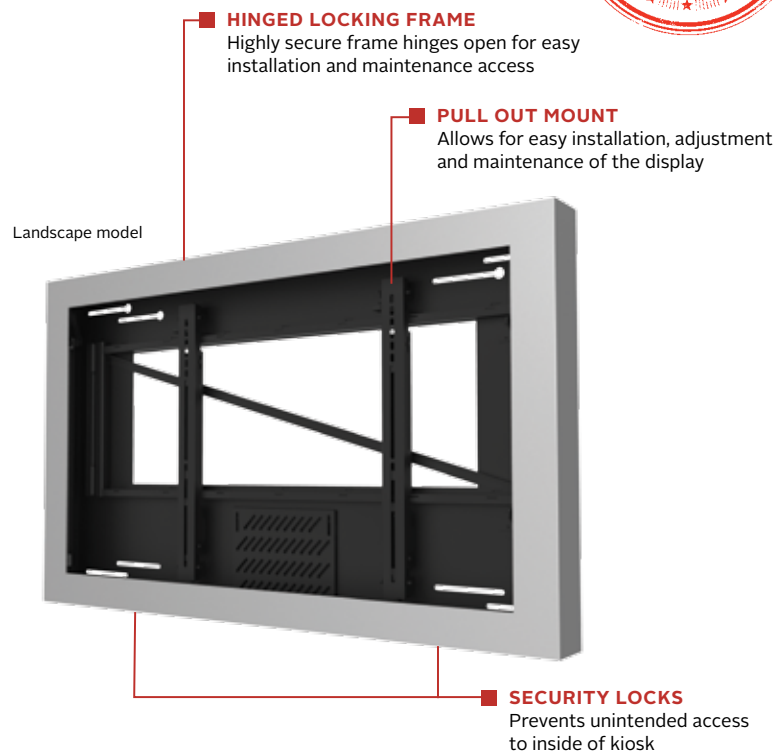

Portrait model



Pull out mount for easy installation of display



RoHS
2002/95/EC



Model Numbers

WARRANTY: 5 years on metal components, 1 year on electronic components

Landscape Models:

KIL640(-S)	Wall Kiosk Enclosure fits 40" Displays up to 2" (50mm) Thick
KIL642(-S)	Wall Kiosk Enclosure fits 42" Displays up to 2" (50mm) Thick
KIL646(-S)	Wall Kiosk Enclosure fits 46" Displays up to 2" (50mm) Thick
KIL647(-S)	Wall Kiosk Enclosure fits 47" Displays up to 2" (50mm) Thick
KIL648(-S)	Wall Kiosk Enclosure fits 48" Displays up to 2" (50mm) Thick
KIL655(-S)	Wall Kiosk Enclosure fits 55" Displays up to 2" (50mm) Thick

Portrait Models:

KIP640(-S)	Wall Kiosk Enclosure fits 40" Displays up to 2" (50mm) Thick
KIP642(-S)	Wall Kiosk Enclosure fits 42" Displays up to 2" (50mm) Thick
KIP646(-S)	Wall Kiosk Enclosure fits 46" Displays up to 2" (50mm) Thick
KIP647(-S)	Wall Kiosk Enclosure fits 47" Displays up to 2" (50mm) Thick
KIP648(-S)	Wall Kiosk Enclosure fits 48" Displays up to 2" (50mm) Thick
KIP655(-S)	Wall Kiosk Enclosure fits 55" Displays up to 2" (50mm) Thick

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
KIL640/642 models	43.50" x 27.00" x 3.97" (1105 x 686 x 101mm)	55.6lb (25kg)	75lb (34kg)	Powder Coat	KIL640/642/646/647/648/655: Gloss black
KIP640/642 models	27.00" x 43.50" x 3.97" (686 x 1105 x 101mm)	62.6lb (28kg)			KIP640/642/646/647/648/655: Gloss black
KIL646/647/648 models	48.00" x 29.00" x 3.97" (1219 x 737 x 101mm)	61.8lb (28kg)			
KIP646/647/648 models	29.00" x 48.00" x 3.97" (737 x 1219 x 101mm)	67.8lb (30kg)			
KIL655 models	56.00" x 34.01" x 3.97" (1422 x 866 x 101mm)	75.5lb (34kg)			KIL640-S/642-S/646-S/647-S/648-S/655-S: Silver
KIP655 models	34.01" x 56.00" x 3.97" (866 x 1422 x 101mm)	79.5lb (36kg)			KIP640-S/642-S/646-S/647-S/648-S/655-S: Silver

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
KIL640/642 models	50.00" x 36.00" x 8.00" (1270 x 914 x 203mm)	65.6lb (29kg)	KIL640: 735029296904	Kiosk with display mounting hardware	1
KIP640/642 models		72.6lb (32kg)	KIP640: 735029296874		
KIL646/647/648 models	54.00" x 39.00" x 8.00" (1371 x 990 x 203mm)	71.8lb (32kg)	KIL640-S: 735029296959		
KIP646/647/648 models		77.8lb (35kg)	KIP640-S: 735029296935		
KIL655 models	62.00" x 43.00" x 8.00" (1574 x 1092 x 203mm)	85.5lb (38kg)	KIL642: 735029297444		
KIP655 models		89.5lb (40kg)	KIP642: 735029297451		

Accessories

ACC415:	4-pack Metal Stud Fastener Kit
CL-SCG200:	Screen Cleaning Gel
DEB-HD10:	32' (10m) High Speed HDMI® Cables with Ethernet
PVP1000-PL6:	Surge Protector with Six Outlets

KioskBuilder™:


Build your own Integrated Kiosk @ kiosks.peerless-av.com including integration services, flat panel display, media player, content management software, power protection, thermal management, display protection, vinyl graphics, etc.



Agion antimicrobial protection:

Agion® antimicrobial* finish available to assist in controlling the spread of infections. Contact Peerless-AV Customer Care for more information.

*Antimicrobial protection is limited to the treated article and does not protect a user against disease causing bacteria. Always clean products thoroughly after each use.

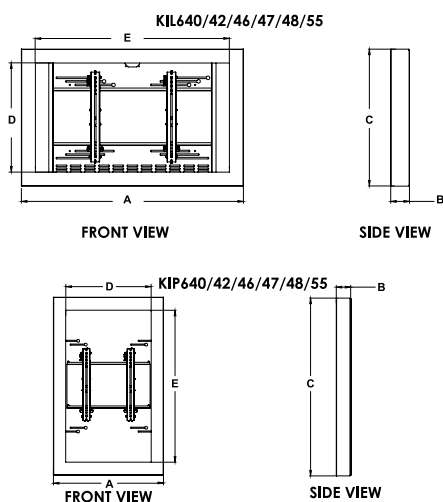

All dimensions = inch (mm)

MODEL NO.	DIMENSION "A"	DIMENSION "B"	DIMENSION "C"	DIMENSION "D"	DIMENSION "E"
KIL640	43.50" (1105mm)	3.97" (101mm)	27.00" (686mm)	19.67" (500mm)	34.97" (888mm)
KIL642	43.50" (1105mm)	3.97" (101mm)	27.00" (686mm)	20.65" (525mm)	36.72" (933mm)
KIL646	48.00" (1219mm)	3.97" (101mm)	29.00" (737mm)	22.61" (574mm)	40.20" (1021mm)
KIL647	48.00" (1219mm)	3.97" (101mm)	29.00" (737mm)	23.10" (587mm)	41.07" (1043mm)
KIL648	48.00" (1219mm)	3.97" (101mm)	29.00" (737mm)	23.59" (599mm)	41.94" (1065mm)
KIL655	56.00" (1422mm)	3.97" (101mm)	34.01" (866mm)	27.03" (686mm)	48.05" (1220mm)

MODEL NO.	DIMENSION "A"	DIMENSION "B"	DIMENSION "C"	DIMENSION "D"	DIMENSION "E"
KIP640	27.00" (686mm)	3.97" (101mm)	43.50" (1105mm)	19.67" (500mm)	34.97" (888mm)
KIP642	27.00" (686mm)	3.97" (101mm)	43.50" (1105mm)	20.65" (525mm)	36.72" (933mm)
KIP646	29.00" (737mm)	3.97" (101mm)	48.00" (1219mm)	22.61" (574mm)	40.20" (1021mm)
KIP647	29.00" (737mm)	3.97" (101mm)	48.00" (1219mm)	23.10" (587mm)	41.07" (1043mm)
KIP648	29.00" (737mm)	3.97" (101mm)	48.00" (1219mm)	23.59" (599mm)	41.94" (1065mm)
KIP655	34.01" (866mm)	3.97" (101mm)	56.00" (1422mm)	27.03" (686mm)	48.05" (1220mm)

Architect Specifications

The Wall Kiosk Enclosure shall be a Peerless-AV model KIL/KIP640(-S), 642(-S), 646(-S), 647(-S), 648(-S) or 655(-S) and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA

(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV Europe
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV de México
Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66050
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360



LIT-1079 rev.2