

KIP540B(-S), KIP542B(-S),
KIP546B(-S), KIP547B(-S),
KIP555B(-S)



Display size
**40", 42", 46",
47" or 55"**



Max load
150lb (68kg)

Portrait Back-to-Back Kiosk Enclosure

Fits 40", 42", 46", 47", and 55" Ultra-Thin Displays up to 1.83" (46mm) Thick

Make a statement with Peerless-AV's versatile digital signage kiosk. Designed to support two displays, back-to-back, this kiosk accentuates the sleek look of the displays while providing ample space to integrate a media player, interactive touch system, etc. to create a complete interactive kiosk experience. Paired with a wide range of aesthetic options, this modular line of kiosks makes it easy to execute any advertising or branding strategy.

*Displaying digital signage content
has never been easier!*



Additional Features

- ✓ Eight point adjustment to quickly position the display within the kiosk window for a flush alignment
- ✓ Accommodates ultra-thin displays up to 1.83" (46mm) thick
- ✓ VESA® 200 x 200 up to 800 x 400mm compatible
- ✓ Thermostat controlled circulation fans ensure proper airflow within the kiosk
- ✓ Secured doors allow convenient access to the display, media player and other internal components for easy installation and maintenance
- ✓ Stand-alone kiosk enclosure or fully integrated with display, media player, power and thermal management, etc.
- ✓ Supports a wide range of aesthetic options including glass/acrylic, multiple colors, vinyl wraps, etc. to best match environment or promote brand strategy
- ✓ Pre-assembled to simplify installation of entire solution



DOUBLE DOOR LOCKS

Highly secure barrel locks prevent unintended access to inside of kiosk

8-WAY MICRO ADJUSTMENT

Provides quick vertical, horizontal and depth adjustment of display

FLAT BASE

Unobtrusive design can be free standing or bolted to floor for increased safety and security



Fits most 40", 42", 46", 47" and 55" displays up to 1.83" (46mm) thick



RoHS
2002/95/EC

Model Numbers

WARRANTY: 5 years on metal components, 1 year on electronic components

KIP540B(-S)	Portrait Back-to-Back Kiosk Enclosure fits 40" Ultra-Thin Displays up to 1.83" (46mm) Thick
KIP542B(-S)	Portrait Back-to-Back Kiosk Enclosure fits 42" Ultra-Thin Displays up to 1.83" (46mm) Thick
KIP546B(-S)	Portrait Back-to-Back Kiosk Enclosure fits 46" Ultra-Thin Displays up to 1.83" (46mm) Thick
KIP547B(-S)	Portrait Back-to-Back Kiosk Enclosure fits 47" Ultra-Thin Displays up to 1.83" (46mm) Thick
KIP555B(-S)	Portrait Back-to-Back Kiosk Enclosure fits 55" Ultra-Thin Displays up to 1.83" (46mm) Thick

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
KIP540B/KIP542B(-S)	28.00" x 72.12" x 20.50" (711 x 1832 x 521mm)	154lb (70kg)	150lb (68kg)	Powder Coat	KIP540B, KIP542B, KIP546B, KIP547B, KIP555B: Gloss black
KIP546B/ KIP547B(-S)	34.00" x 72.12" x 20.50" (864 x 1832 x 521mm)	165lb (75kg)			KIP540B-S, KIP542B-S, KIP546B-S, KIP547B-S, KIP555B-S: Silver
KIP555B(-S)	34.00" x 78.12" x 20.50" (864 x 1984 x 521mm)	174lb (79kg)			

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
KIP540B/KIP542B(-S)	48.00" x 78.00" x 40.00" (1219 x 1966 x 1016mm)	200lb (91kg)	KIP540B: 735029297352 KIP540B-S: 735029297369 KIP542B: 735029297376 KIP542B-S: 735029297383	Kiosk with display mounting hardware	1
KIP546B/ KIP547B(-S)	48.00" x 78.00" x 40.00" (1219 x 1966 x 1016mm)	212lb (96kg)	KIP546B: 735029296829 KIP546B-S: 735029296843 KIP547B: 735029297116 KIP547B-S: 735029296850		
KIP555B(-S)	48.00" x 83.00" x 40.00" (1219 x 2108 x 1016mm)	222lb (101kg)	KIP555B: 735029296836 KIP555B-S: 735029296836		

Accessories

PVP1000-PL6: Surge Protector with Six Outlets

CL-SCG200: Screen Cleaning Gel

DEB-HD10: 32' (10m) High Speed HDMI® Cables with Ethernet


Agion antimicrobial protection:

Agion® antimicrobial* finish available to assist in controlling the spread of infections. Contact Peerless-AV Customer Care for more information.

*Antimicrobial protection is limited to the treated article and does not protect a user against disease causing bacteria. Always clean products thoroughly after each use.

KioskBuilder™:

Build your own Integrated Kiosk @ kiosks.peerless-av.com including integration services, flat panel display, media player, content management software, power protection, thermal management, display protection, vinyl graphics, etc.

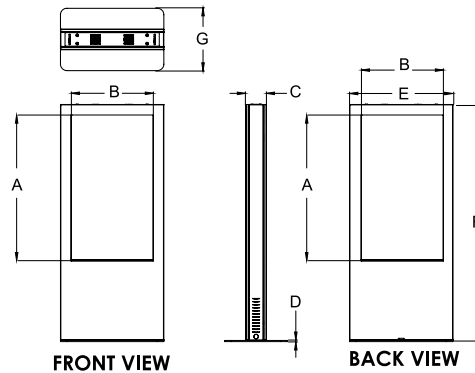

All dimensions = inch (mm)

MODEL NO.	DIMENSION "A"	DIMENSION "B"	DIMENSION "C"	DIMENSION "D"	DIMENSION "E"	DIMENSION "F"	DIMENSION "G"
KIP540B	34.97"(888mm)	19.67"(500mm)	6.80"(173 mm)	.38"(10mm)	28.00"(711mm)	72.12"(1832mm)	20.50"(521mm)
KIP542B	36.72"(933mm)	20.65"(525mm)	6.80"(173 mm)	.38"(10mm)	28.00"(711mm)	72.12"(1832mm)	20.50"(521mm)
KIP546B	40.20"(1021mm)	22.61"(574mm)	6.80"(173 mm)	.38"(10mm)	34.00"(864mm)	72.12"(1832mm)	20.50"(521mm)
KIP547B	41.07"(1043mm)	23.10"(587mm)	6.80"(173 mm)	.38"(10mm)	34.00"(864mm)	72.12"(1832mm)	20.50"(521mm)
KIP555B	48.05"(1220mm)	27.03"(686mm)	6.80"(173 mm)	.38"(10mm)	34.00"(864mm)	78.12"(1984mm)	20.50"(521mm)

Architect Specifications

The Portrait Back-to-Back Kiosk Enclosure shall be a Peerless-AV model KIP540B(-S), KIP542B(-S), KIP546B(-S), KIP547B(-S) or KIP555B(-S) and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA

(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV Europe
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV de México
Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66050
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360



LIT-1078 rev.3